

VPC 250  
VPC 400



If you  
can think  
it, we can  
pack it!



**Vertical high-performance machines with a unique cost-benefit ratio for small and medium sized bags. Extremely efficient form, fill and seal process, gentle product handling.**

**Cost effectiveness and functional efficiency, gentle product handling**

Servo driven moving and conveying functions. Accuracy and reliability, from the wrapping material infeed to bag shaping and seam sealing up to the filling, also for delicate products. The dosing process starts immediately after the bottom sealing via synchronized dosing units, such as cup or auger feeders, weighers or pumps.

- Continuous or intermittent mode upon customer's choice
- Nearly wear- and maintenance-free operation
- Quick and easy size change
- Compact, operator-friendly design
- Programmable control
- Colour touch screen

- Electronic control for bag length
- Photoeye control for accurate eyemark reading of printed films
- Servo driven cross sealing station
- Servo driven film draw-down belts
- Adjustable sealing time
- Adjustable stroke of cross sealing jaws (depending on bag size)
- Motor for film tracking adjustment
- Longitudinal jaws mechanically driven
- Film width up to 600 mm
- Longitudinal jaws mechanically driven
- Unilaterally suspended pneumatical film tensioning shaft
- Operator-friendly safety doors with locking magnets



## VPC 250 VPC 400

If you  
can think  
it, we can  
pack it!


### Customer-specific options

- Impulse sealing system for PE
- Optimized gusseting device
- Automatic film tracking
- Corner creasing on forming tube
- Offset vertical seal
- Stainless steel design
- Modem for data transmission
- 4 corner sealing system (Stabil-Pack)
- Video communication system
- Duplex execution

### Future-compliant conception with long life expectancy

Wolf form, fill and seal packaging machines offer a high investment security, based on clear principles and comfortably at the front side of the machine.

### Technical Data

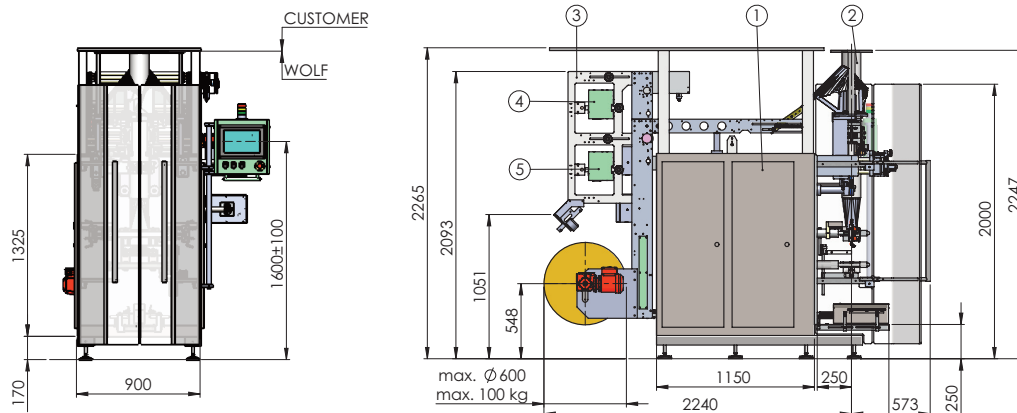

	VPC 250	/	VPC 400
<b>Machine height</b>	1955 mm		2200 mm
<b>Machine width</b>	1320 mm		1550 mm
<b>Machine depth</b>	2380 mm		2540 mm
<b>Bag width</b>	50 – 250 mm		70 – 410 mm
<b>Bag length</b>	80 – 450 mm		80 – 700 mm
<b>Filling volume</b>	6000 cm <sup>3</sup>		20000 cm <sup>3</sup>
<b>Film reel diameter</b>	600 mm		600 mm

- Observance of strict quality standards for material and processing
- Minimization of the number of technical components due to a modular machine structure
- Innovative design and up-to-date technology, which enables easy retrofitting
- Qualified maintenance, fast service

### High quality additional and peripheral equipment

Dosers, weighers, automatic film splicers, infeed and inserting modules as well as rotary tables complete our programme of vertical, horizontal and top closing packaging machines. For more efficiency all along the line.

	VPC 250	/	VPC 400
<b>Performance*</b>	up to 200 bpm		up to 120 bpm
<b>Air requirements **</b>	approx. 100 l /min at 6 bar		
<b>Energy requirement</b>	4.5 kW		4.5 kW
<b>Mains connections</b>	400 V, 3 Ph., N, 50/60 Hz		
<b>Type of protection</b>	IP 54		
<b>Weight</b>	1000 kg		1200 kg

\* depending on product and wrapping material

\*\* depending on performance

Subject to technical modifications

From engineering to operation, from the silo to the palletizer - we offer intelligent and complete solutions for efficient packaging lines from one source.

WOLF Verpackungsmaschinen GmbH

Bettenhäuser Straße 3  
35423 Lich-Birklar, Germany  
Tel.: +49 64 04 91 82-0  
contact@wolf-packaging.com  
www.wolf-packaging.com



www.youtube.com/@  
ThePackagingGroup